



Häfele's extensive range of high-quality foldaway bed fittings has something for everyone.


The guest bed remains invisible inside the cabinet wall, saving space until it's needed. If a second guest arrives, just pull a handle and the bunk bed folds easily out of the cabinet (see photo).

In the blink of an eye, a bed transforms into a desk with a shelf – a unique piece that does two jobs.

Foldaway bed fitting, for construction of foldaway beds according to customer's own requirements


	Installation		Weight of bed kg	Mattress and slatted frame		Page
	End mounted	Side mounted		Without	With	
	✓		50–100	✓		► FF 7.80
		✓	40–80	✓		► FF 7.82
	Mattresses					► FF 7.89

Foldaway bed fitting, with frame and slatted frame

	Installation		For mattress size (W x L) mm	Version	Mattress		Page
	End mounted	Side mounted			Without	With	
	✓		900 x 2,000	With angular foot	✓	✓	► FF 7.81
	✓		1,400 x 2,000	With angular foot	✓	✓	► FF 7.81
	✓		900 x 2,000	With angular foot	✓	✓	► FF 7.83
	✓		1,400 x 2,000	With angular foot	✓	✓	► FF 7.83
		✓	900 x 2,000	With angular foot	✓	✓	► FF 7.84
	✓		900 x 2,000	Low installation height	✓	✓	► FF 7.84
		✓	1200 x 2,000	Free choice of installation position	✓	✓	► FF 7.86

Foldaway bed fitting, special solutions

e.g. for motor home, caravan, boat, youth hostel, hotel/bed and breakfast accommodation, guest room

	Installation		For mattress size (W x L) mm	Area of application	Mattress		Page
	End mounted	Side mounted			Without	With	
		✓	900 x 2000	Single bed and/or bunk/loft bed	✓	✓	► FF 7.85
		✓	1200 x 2,000	Single bed or sofa	✓	✓	► FF 7.86
		✓	1,400 x 2,000	Bed or sofa	✓		► FF 7.87
		✓	900 x 2,000	Bed or desk	✓		► FF 7.88
		✓	1,400 x 2,000	Bed or desk	✓		► FF 7.88

Bettlift Foldaway bed fitting, for construction of foldaway beds according to customer's own requirements




End mounted

Order reference


Bed weight = total weight of the bed box, slatted frame, mattress and bedding

Note




All built-in foldaway beds must be prevented from tipping in accordance with EN 1129. Ensure that the surface is suitable for attaching the securing brackets.

Installation



End mounted



Side mounted



The specified cabinet dimensions are internal cabinet dimensions

- > Material: Steel
- > Finish: Powder coated
- > Colour: Black, RAL 9011

Construction recommendation

Material thickness of bed box and cabinet 20 mm

Internal cabinet height Mattress length + 170 mm

Internal cabinet width Mattress width + 94 mm

Two bed boxes must be mounted next to each other to make a double bed. Not compatible with centre support.

- > Bed weight: Max. 100 kg

Supplied with

- 1 pair of foldaway bed fittings with pivot bearings and positioning bolts for gas-filled struts
- 2 securing brackets (anti-tilt facility)
- 1 set of fixing material
- 1 set of installation instructions

	Cat. No.
Foldaway bed fitting for end mounting	271.95.203

Packing: 1 set

Order reference

Order 2 gas-filled struts and 1 pair of angular feet for appropriate bed weight separately.

- > Version: Pre-tensioned with elastic strap


Bed weight kg	Shear force N	Cat. No.
50	900	271.99.220
60	1100	271.99.266
70	1300	271.99.300
80	1500	271.99.346
90	1700	271.99.382
100	1900	271.99.410

Packing: 1 piece


Bedding strap

► FF 7.82

→ For end mounting

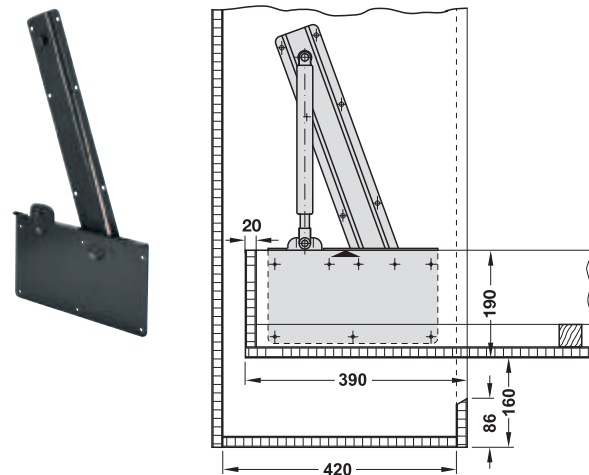

Gas-filled strut



Order reference

Example: 2 gas-filled struts each for 100 kg must be ordered for a bed weight of 100 kg.

Basic Built-in foldaway bed, bed lift with slats




- > Area of application: For inset front
- > Load bearing capacity: 100 kg
- > Material: Frame: Torsion-free tubular steel, slats: Laminated wood, caps: Rubber
- > Finish: Slats: Unfinished
- > Colour: Frame: Graphite black, RAL 9011, foot linkage: White aluminium, RAL 9006
- > Version: With gas filled strut for easy opening and closing, 12 resilient wooden slats

Supplied with

- 1 built-in foldaway bed with frame, gas-filled struts, slatted frame and angular feet
- 2 securing brackets (anti-tilt facility)
- 3 bedding straps
- 2 mattress holders
- 2 gas-filled struts
- 1 set of installation instructions

Note



All built-in foldaway beds must be prevented from tipping in accordance with EN 1129. Please ensure that the surface is suitable for attaching the securing brackets.

Automatic foot mechanism

Angular feet automatically come out when the bed is opened and are retracted when the bed is closed again.


Construction recommendation

Component	Material thickness
Front panel	19 mm
Cabinet side panel/base panel, plinth	19–22 mm*

Order reference

Bed weight = total weight of front panel, mattress, bedding and bedroom runner, if applicable

→ End mounted single bed, double bed or french bed




X = top edge of slatted frame 330 mm

The specified cabinet dimensions are internal cabinet dimensions

For mattress size (W x L) mm	Bed weight kg	Width B mm	Cat. No.
900 x 2000	44–55	960	271.91.118
1400 x 2000	60–80	1460	271.91.138

Packing: 1 piece

→ For side mounting

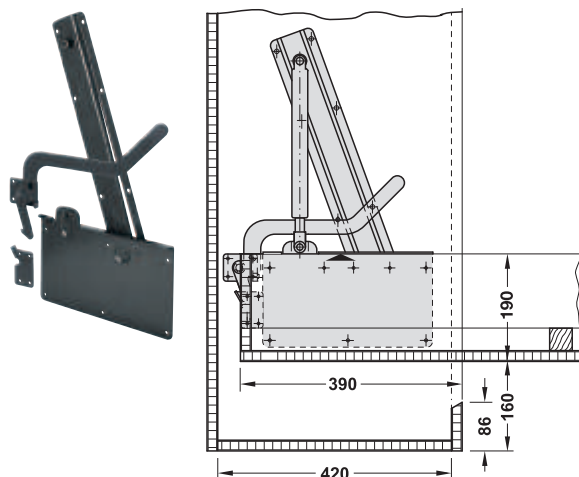

> Bed weight: Max. 80 kg

Supplied with

- 1 pair of foldaway bed fittings with pivot bearings and positioning bolts for gas-filled struts
- 2 securing brackets (anti-tilt facility)
- 1 safety lever with stop plate
- 1 set of fixing material
- 1 set of installation instructions


	Cat. No.
Foldaway bed fitting for side mounting	271.95.204

Packing: 1 set

Order reference

Order 2 gas-filled struts and 1 pair of angular feet for appropriate bed weight separately.

Gas-filled strut



Order reference


Example: 2 gas-filled struts each for 80 kg must be ordered for a bed weight of 80 kg.

> Version: Pre-tensioned with elastic strap

Bed weight kg	Shear force N	Cat. No.
40	400	271.99.122
50	500	271.99.140
60	600	271.99.168
70	700	271.99.186
80	800	271.99.202

Packing: 1 piece

→ Angular foot

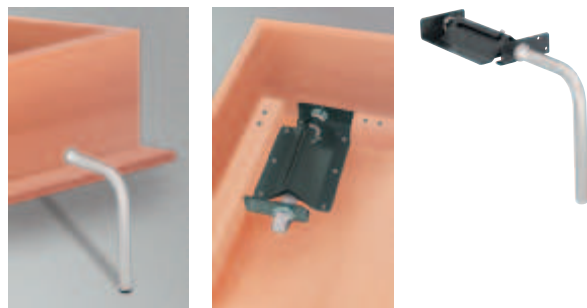

- > Area of application: For supporting the open bed
- > Material: Steel
- > Finish: Powder coated
- > Version: With mounting plate

Functionality

The angular feet must be pulled out when the bed is opened, turned by 90° and pushed back in again until the stop is reached.

Installation

Screw mounting plate of angular foot to foot side of bed frame and rear side of front panel.

A squared edge timber measuring at least 40 x 40 mm is needed on all four sides as slatted frame support.

Colour	Cat. No.
Mounting plate: Black, RAL 9011, angular foot: White aluminium, RAL 9006	271.95.361

Packing: 1 pair

→ Bedding strap



- > Area of application: For holding bedding when closing the bed
- > Supplied with: 3 straps


Suitable for	Cat. No.
Mattress width ≤900 mm	271.87.920
Mattress width ≤1200 mm	271.87.921
Mattress width ≤1400 mm	271.87.922

Packing: 1 set

Bettlift Built-in foldaway bed with slatted frame and adjustable head section



Note




All built-in foldaway beds must be prevented from tipping in accordance with EN 1129. Ensure that the surface is suitable for attaching the securing brackets.

Automatic foot mechanism

Angular feet automatically come out when the bed is opened and are retracted when the bed is closed again.

→ End mounted single, double or french bed

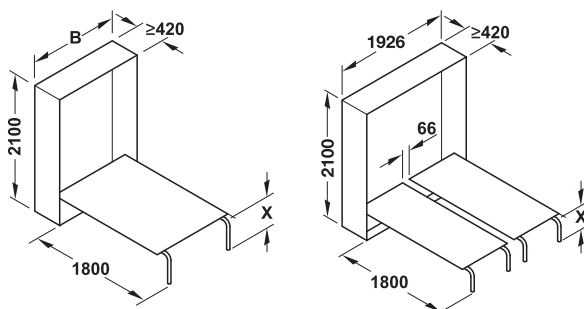


X = slatted frame top edge 330 mm

The specified cabinet dimensions are internal cabinet dimensions

Note

Built-in foldaway bed for mattress size 1,600 x 2,000 mm from 25 pieces available on request.
Replacement gas-filled struts for foldaway beds 271.91.135/136 are double lift gas-filled struts and only available for bed weight of 60–80 kg.

Centre support

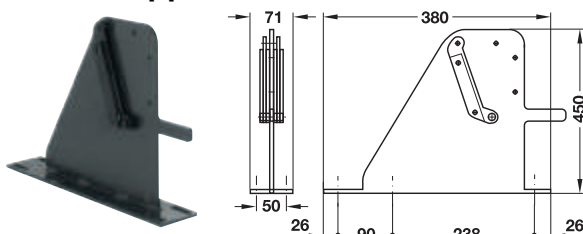

> Area of application:	For inset front
> Material:	Frame: Torsion-free tubular steel, slatted frame: Laminated wood, caps: Rubber
> Load bearing capacity:	100 kg
> Finish:	Slatted frame: Unfinished wood
> Colour:	Frame: Graphite black, RAL 9011, foot linkage: White aluminium, RAL 9006
> Version:	With gas-filled strut for easy opening and closing, with 28 flexibly mounted resilient wooden slats, with shoulder comfort zone, 5 double slats for central zone reinforcement and centre strap, firmness rating continuously adjustable

Supplied with

- 1 built-in foldaway bed with frame, gas-filled struts, slatted frame with adjustable head section and angular feet
- 2 securing brackets (anti-tilt facility)
- 3 bedding straps
- 2 mattress holders
- 1 set of installation instructions
- 2 gas-filled struts

Order reference

Bed weight = total weight of the front panel, mattress, bedding and bedroom runner (if applicable).

Construction recommendation

Component	Material thickness
Front panel	19 mm
Cabinet base panel, side panels, plinth	19–22 mm

For mattress size (W x L) mm	Bed weight kg	Width B mm	With mattress	Without mattress
900 x 2000	44–55	960	271.91.115	271.91.114
1400 x 2000	60–80	1460	271.91.136	271.91.135

Packing: 1 set

	For mattress size (W x L) mm	Bed weight kg	Spring force N	Cat. No.
Replacement gas-filled strut	900 x 2000	38–43	1600	271.99.355
		44–55	1700	271.99.373
		56–65	2000	271.99.426
	1400 x 2000	60–80	1400/2800	271.99.505

Packing: 1 piece

Order reference


Order 2 single beds and 1 centre support to make a double bed.

> Area of application:	For connecting two single beds to make a double bed (can be opened separately)
> Material:	Steel

Finish/colour	Cat. No.
Powder coated, graphite black, RAL 9011	271.87.101

Packing: 1 piece

→ Side mounted bed



X = slatted frame top edge 330 mm

The specified cabinet dimensions are internal cabinet dimensions

For mattress size (W x L) mm	Bed weight kg	Version	Cat. No.
900 x 2000	44–55	Without mattress	271.91.145
		With mattress	271.91.146

Packing: 1 set

	Bed weight kg	Spring force N	Cat. No.
Replacement gas-filled strut	44–55	1100	271.99.257
	56–65	1300	271.99.291

Packing: 1 piece

Bettlift Built-in collapsible foldaway bed with frame, slatted frame and adjustable head section



Resilient wooden slat mounting

- > Area of application: For inset front
- > For mattress size (W x L): 900 x 2,000 mm
- > Bed weight: 41–45 kg
- > Load bearing capacity: 100 kg
- > Material: Frame: Torsion-free tubular steel, resilient slats: Unfinished beech
- > Colour: Frame: Graphite black, RAL 9011, slatted frame: Light beige, foot linkage: White aluminium, RAL 9006
- > Version: Foldaway bed for screw fixing to base panel, resilient wooden slats mounted in plastic pockets, head section adjustable to 7 positions

Supplied with

- 1 bettlift built-in collapsible foldaway bed with frame, slatted frame and angular feet
- 2 securing brackets (anti-tilt facility)
- 3 bedding straps
- 2 mattress holders
- 1 set of installation instructions
- 2 gas-filled struts

Construction recommendation


Component	Material thickness
Front panel	19 mm
Cabinet side panel/base panel, plinth	19–22 mm*

2 single beds can be installed next to each other to make a double bed. Each bed can be opened individually. *Use base panel with material thickness of 22 mm for double bed constructions.

Order reference

Bed weight = total weight of the front panel, mattress, bedding and bedroom runner (if applicable).
Other bed weights on request.

Note





All built-in foldaway beds must be prevented from tipping in accordance with EN1129. Ensure that the surface is suitable for attaching the securing brackets.

Automatic foot mechanism

Angular feet automatically come out when the bed is opened and are retracted when the bed is closed again.

→ End mounted single or double collapsible bed



X = slatted frame top edge approx. 300 mm

The specified cabinet dimensions are internal cabinet dimensions

Version	Cat. No.
Without mattress	271.96.155
With mattress	271.96.154




Packing: 1 set

	Bed weight kg	Spring force N	Cat. No.
Replacement gas-filled strut	41–45	1500	271.99.338
	46–50	1600	271.99.356
	51–55	1700	271.99.374

Packing: 1 piece

Häfele Duoletto Built-in foldaway bed, side mounted, with slatted frame

- > Variable and freely selectable mounting height when used as single bed
- > The same fitting can be used for bunk beds

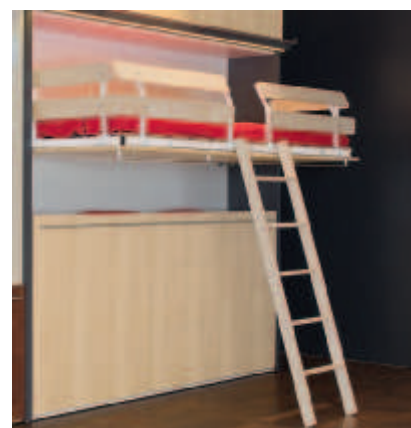

As single bed


As bunk bed

Specified cabinet dimensions are external cabinet dimensions.

Construction recommendation

Component	Material thickness
Front panel	16 mm
Cabinet base panel, plinth	19 mm
Rear panel, cabinet side panel	22 mm

Note



All built-in foldaway beds must be prevented from tipping in accordance with EN1129. Ensure that the surface is suitable for attaching the securing brackets.

- > Area of application: Single and/or bunk bed/loft bed
- > For mattress size (W x L): 900 x 2,000 mm
- > Load bearing capacity: 100 kg
- > Bed weight: 55–85 kg
- > Material: Frame: Torsion-free tubular steel with resilient wooden slats
- > Finish: Powder coated white, RAL 9016
- > Version: With gas-filled strut for easy opening and closing, with 12 flexibly mounted resilient wooden slats
- > Installation: Quick fixing system, bearing plates pre-mounted

Supplied with

- 1 foldaway bed, with frame and slatted frame
- 2 securing brackets (anti-tilt facility)
- 3 bedding straps
- 6 mattress holders
- 1 set of installation instructions
- 2 gas-filled struts

Version	Cat. No.
Without mattress	271.89.000
With mattress	271.89.005

Packing: 1 set

	Bed weight kg	Spring force N	Cat. No.
Replacement gas-filled strut	55–85	400	271.89.920

Packing: 1 piece

Order reference

Please order accessories for use as bunk bed/loft bed (hook-in ladder and bed guard) separately.

→ Accessories for bunk bed/loft bed



- > Material: Ladder, bed guard: Laminated wood, can be lacquered, brackets: Tubular steel
- > Dim.: Ladder: 1,475 x 397 x 60 mm
- > Finish: Brackets: Powder coated, white RAL 9016


	Cat. No.
Hook-in ladder and bed guard	271.89.010

Packing: 1 set




Häfele Teleletto Foldaway sofa bed fitting with frame and slatted frame

- > The bed easily becomes a sofa
- > Fitting can also be used without sofa
- > Extra large lying area

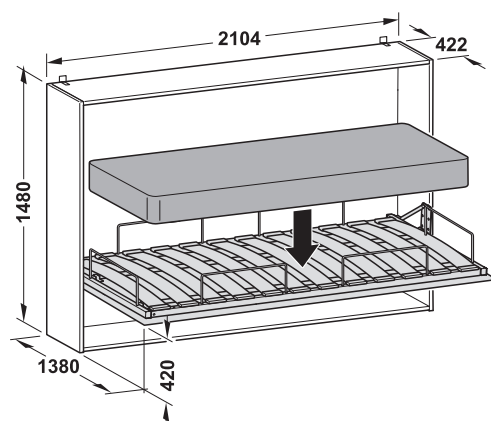

Specified cabinet dimensions are external cabinet dimensions.

Note



All built-in foldaway beds must be prevented from tipping in accordance with EN 1129. Ensure that the surface is suitable for attaching the securing brackets.

- > Area of application: Hotel, bed and breakfast accommodation, guest room
- > For mattress size (W x L): 1,200 x 2,000 mm
- > Bed weight: 74–110 kg
- > Load bearing capacity: 100 kg
- > Material: Frame: Torsion-free tubular steel with resilient wooden slats
- > Finish: Powder coated white, RAL 9016
- > Version: With gas-filled strut for easy opening and closing, with 12 flexibly mounted resilient wooden slats
- > Installation: Quick fixing system
- > Internal cabinet width: 2,060 mm
- > Internal cabinet height: 1,442 mm
- > Internal cabinet depth: 400 mm

Supplied with

- 1 built-in foldaway bed, with frame and slatted frame
- 2 securing brackets (anti-tilt facility)
- 6 mattress holders
- 3 bedding straps
- 1 set of installation instructions
- 2 gas-filled struts

Construction recommendation

Component	Material thickness
Front panel	16 mm
Cabinet base panel, plinth	19 mm
Rear panel, side panel	22 mm

Mounting height can be selected variably depending on the required seat height

Version	Cat. No.
Without mattress	271.89.001
With mattress	271.89.006

Packing: 1 set

	Bed weight kg	Spring force N	Cat. No.
Replacement gas-filled strut	74–110	700	271.89.921

Packing: 1 set

Order reference

Bed weight = total weight of the front panel, mattress, bedding and bedroom runner (if applicable)

Mattress 1,200 x 2,000 mm

► FF 7.89

Häfele Teleletto II Foldaway sofa bed fitting with bed frame, slatted frame and sofa frame

- > The sofa quickly becomes a bed
- > Space saving, ideal for use in hotels, bed and breakfast accommodations or as guest bed
- > Extra large lying area 1,400 x 2,000 mm



- > Area of application: Hotel, bed and breakfast accommodation, guest room
- > For mattress size (W x L): 1,400 x 2,000 mm
- > Bed weight: 74–110 kg
- > Load bearing capacity: 100 kg
- > Material: Frame: Torsion-free tubular steel with resilient wooden slats
- > Finish: Powder coated white, RAL 9016
- > Version: With gas-filled strut for easy opening and closing, with 12 flexibly mounted resilient wooden slats
- > Installation: Quick fixing system
- > Internal cabinet width: 2,080 mm
- > Internal cabinet height: 1,535 mm
- > Internal cabinet depth: 419 mm
- > Sofa area 2,057 x 700 mm

Supplied with

- 1 built-in foldaway bed with bed frame, slatted frame, sofa frame and angular feet
- 2 securing brackets (anti-tilt facility)
- 4 mattress holders
- 2 bedding straps
- 1 set of installation instructions
- 2 gas-filled struts

	Cat. No.
Häfele Teleletto II	271.89.020

Packing: 1 set

Order reference

Bed weight = total weight of the front panel, mattress, bedding and bedroom runner (if applicable)

Construction recommendation

Component	Material thickness
Side panel/base panel	38 mm
Front panel, rear panel	19 mm

	Bed weight kg	Spring force N	Cat. No.
Replacement gas-filled strut	74–110	700	271.99.186

Packing: 1 piece


Note

Recommended mattress thickness 140 mm, this provides clearance of 50 mm for bedding when folded in.


Mattress 1,400 x 2,000 mm

► FF 7.89

Bed position

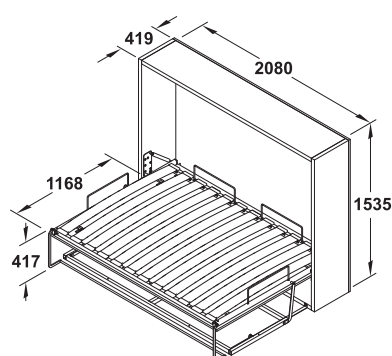


Sofa position

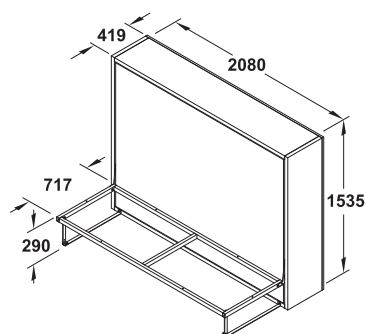

Specified cabinet dimensions are internal cabinet dimensions

Note




All built-in foldaway beds must be prevented from tipping in accordance with EN 1129. Ensure that the surface is suitable for attaching the securing brackets.

Häfele Tavoletto Bed/desk combi fitting


For mattresses with width of 900/1,400 mm



> Space saving, ideal for use as guest bed, in students' hostels and hospitals



Fitting for mattress
900 x 2,000 mm



Fitting for mattress
1,400 x 2,000 mm



Construction recommendation			
Construction dimensions mm		Mattress size mm	
		900 x 2000	1400 x 2000
A		1388	1780
B		1115	1598
C		1086	1188
D		944	1040
E		2160	2140
F		766	769
Max. mattress height	With slatted frame	214	229
	With resilient slats	263	278
Space above desk in bed position		530	551

The construction dimensions apply to side panel thickness of 19 mm.


Note

CAD data and installation instructions for construction are available for downloading.

The specifications of the CAD data must be adhered to. Only then full functionality of the fitting is given.

Wooden and steel elements must be provided on site.


Order reference




All foldaway beds must be prevented from tipping in accordance with EN 1129. Please order securing brackets separately. Ensure that the surface is suitable for attaching the securing brackets.

Securing bracket	► FF 7.89
Mattresses	► FF 7.89
Bedding strap	► FF 7.82

Bed position



Desk position



- > Material: Steel
- > Colour: Black
- > Safety tested by the LGA in compliance with DIN EN 1129

For mattress size (W x L) mm	Supplied with	Cat. No.
Häfele Tavoletto bed/desk combi fitting		
900 x 2000 mm (W x L)	1 fitting set complete for 1 piece of furniture, without fixing material	271.97.300
1400 x 2000 mm (W x L)	1 fitting set complete for 1 piece of furniture, without fixing material	271.97.301

Set of screws

900 x 2000 mm (W x L)	Fixing material for 1 set	271.97.395
1400 x 2000 mm (W x L)	Fixing material for 1 set	271.97.396

Packing: 1 set

Mattress for collapsible and foldaway beds

Lying comfort provided by:

- > Durable shape
- > High point stability, therefore optimum support for the spine and good ventilation
- > Open-pored foam structure with moisture regulation
- > Suitable for collapsible and foldaway beds



- > Material: Core: 7-zone cold foam core
- > Version: All round zip, cover removable and washable at 60°C, suitable for allergy sufferers, weight per unit of volume: 40/kg/m³
- > Firmness: H3 – body weight up to 90 kg
- > Height: 140 mm

Dim. (W x L) mm	Weight kg	Cat. No.
900 x 2000	18	271.67.201
1000 x 2000	20	271.67.202
1200 x 2000	22	271.67.203
1400 x 2000	25	271.67.204
1600 x 2000	33	271.67.205
1800 x 2000	35	271.67.206


Packing: 1 piece

Note

Further mattresses and accessories can be found online at www.hafele.com

Securing bracket

For built-in foldaway beds

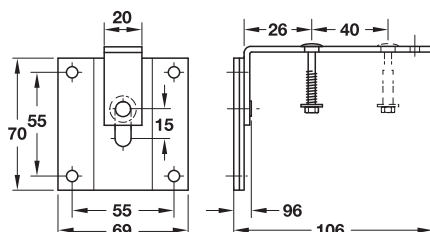

- > Area of application: Anti-tilt facility for foldaway beds
- > Material: Steel
- > Installation: For screw fixing
- > Fixing material supplied


Finish/colour	Cat. No.
Powder coated, graphite black, RAL 9011	271.98.100

Packing: 2 pieces

Bed/desk combi fitting

► FF 7.88

Resilient wooden slats for single beds, 5 layer laminated

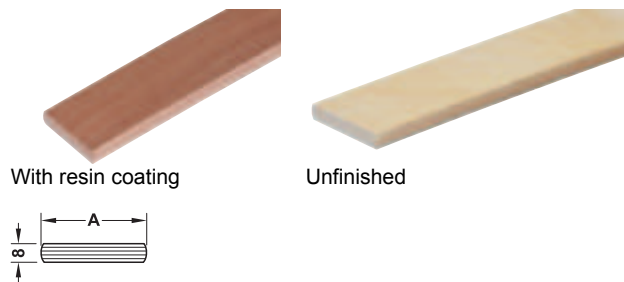


- > Version: Long edges rounded
- > Material: Beech veneer

Finish	Dim. A mm	Length mm	Packing pieces	Cat. No.
With resin coating	53	991	1 or 30	271.63.006
Unfinished	55	888	1	271.63.079

Slat pockets for resilient wooden slats


→ Flexible, for press fitting

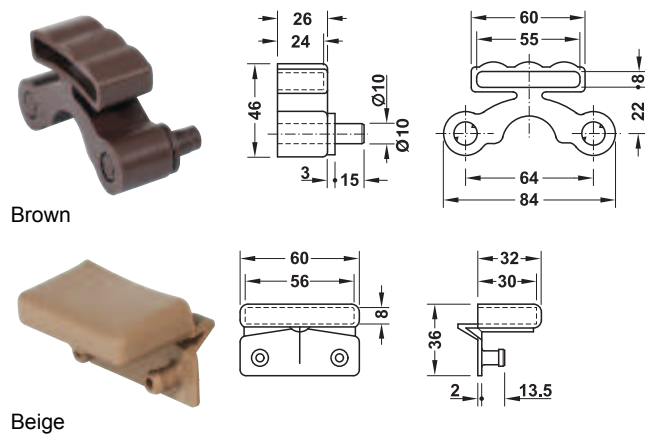

- > Material: Plastic

Colour	Packing pieces	Cat. No.
Brown	100	271.62.125
Beige	10	271.62.170

→ Flexible, for screw fixing

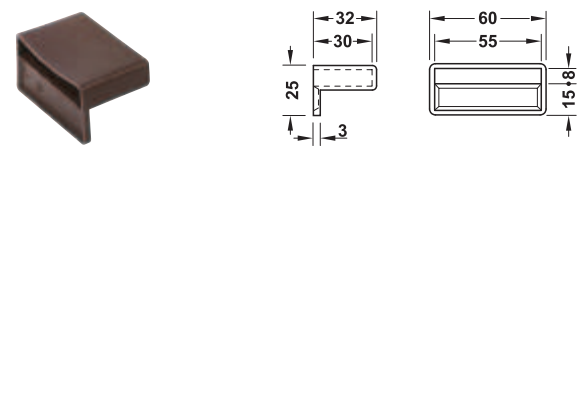

- > Material: Plastic

Colour	Cat. No.
Brown	271.62.116

Packing: 100 pieces

Slatted frame lift

- > Sheets can be changed easily by lifting the slatted frame (B)
- > Maximum use of storage space underneath the slatted frame (C)




Sleeping (A)



Easy change of sheets (B)



Optimum use of storage space (C)

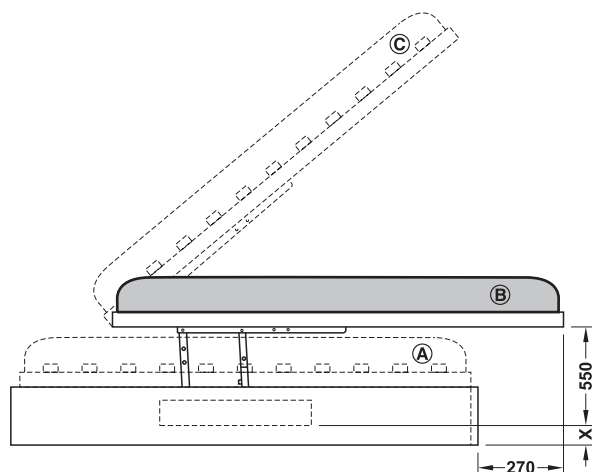


Bed box height min. 260 mm
 Bed box length = slatted frame length + 50 mm
 Bed box width = slatted frame width + 30 mm
 X = optional



Note

Bed weight = total weight of the slatted frame, mattress and bedding

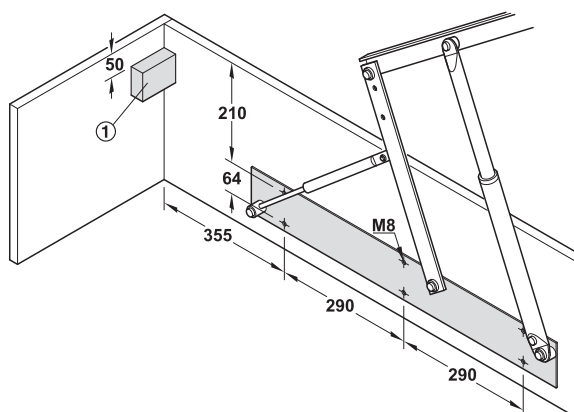

① Support for slatted frame (provided on site)

- > Material: Steel
- > Colour: Silver coloured

Supplied with

- 1 opening mechanism left and right
- 1 cross brace
- 4 gas-filled struts
- 2 fixing profiles for slatted frame
- Fixing material

For mattress size (W x L) mm	Spring force N	Bed weight kg	Cat. No.
900 x 2000	300 + 500	30–35	274.52.911
1000 x 2000	300 + 500	30–35	274.52.912
1400 x 2000	400 + 800	50–60	274.52.913

Packing: 1 set

Order reference

Please order Sanobasic KF or Sanobasic NV slatted frame and mattress separately.

Mattress for collapsible and foldaway beds


► FF 7.89




Scissor jack

- > Area of application: For slatted frames, couches and French beds
- > Material: Steel
- > Finish: Yellow chromatzed
- > Height: Raising height ≤300–375 mm
- > Version: With screw-on plates

Adjustment facility




Engaging positions of scissor jacks for adjustable head and foot sections of slatted frames, couches or French beds, as well as in other application areas.




Note
Lift over upper end position before lowering.

→ In 18 stages

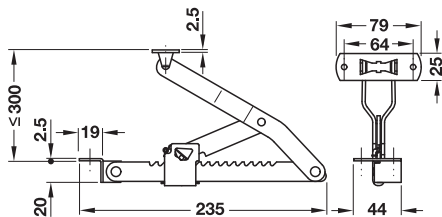

Height mm	Cat. No.
Raising height: ≤300	274.00.933
Packing: 2 or 20 pieces	


→ In 19 stages

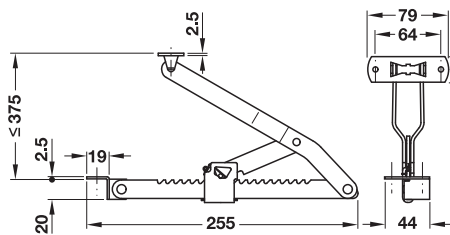


Height mm	Cat. No.
Raising height: ≤375	274.01.930
Packing: 2 or 20 pieces	

Spring-loaded fitting


For end or side opening couches and beds with bed boxes



- > Material: Steel
- > Installation: For screw fixing

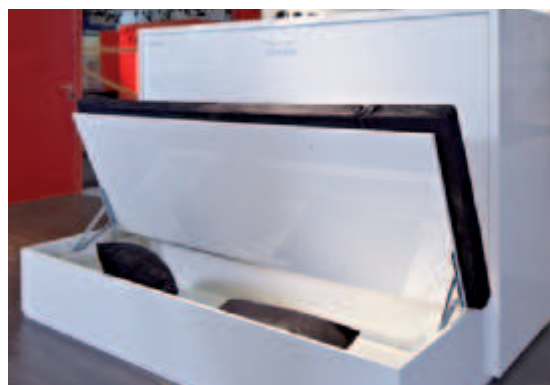

→ 60° for light upholstery with tension spring




	Finish	Packing	Cat. No.
Fitting	Galvanized	1 set	274.51.902
Spring	—	1 piece	274.51.980

Order reference

2 tension springs are required for one set

→ 40° for heavy upholstery with tension spring




	Finish	Packing	Cat. No.
Fitting	Galvanized	1 set	274.51.901
Spring	—	1 piece	274.51.983

Order reference

2 or 4 tension springs are required for each set, depending on size and weight of slatted frame and mattress.

→ 30° with gas loaded spring




	Packing	Cat. No.
Fitting	1 set	274.51.905
Spring 900N for light upholstery	1 piece	274.51.955
Spring 1150N for heavy upholstery	1 piece	274.51.956

Order reference

2 gas loaded springs are required for one set

Lift fitting with gas loaded spring 40°



	Cat. No.
Fitting	274.51.911

Packing: 1 set



Functionality, comfort and design combined in one bedroom

Bed Lift Systems

7





Model Trend



Individuality and comfort

- > With electrically adjustable slatted frame
- > Comfort and seated position
- > Height adjustments up to 40 cm

Model Trend

► TCH-FF
section 8

Model Basic



Improved quality of life

- > With electrically adjustable slatted frame
- > Height adjustments up to 40 cm

Model Basic

► FF 7.96

Model Natural




Natural and pleasant

- > With electrically adjustable slatted frame
- > All supporting elements are made from solid beech
- > Extremely stable
- > Height adjustments up to 40 cm

Model Natural

► TCH-FF
section 8

Model Mobilia

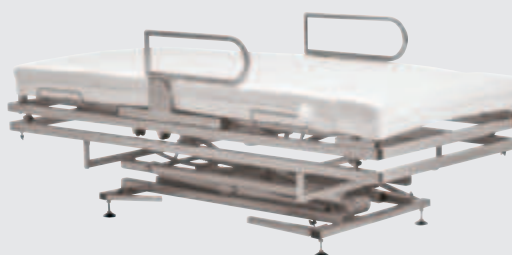

Independence and safety

- > With rotating lying area
- > With or without standing up aid
- > Height adjustments up to 40 cm

Model Mobilia

► TCH-FF
section 8


Model Basic

Vitaflex




- > Area of application: Comfort area, domestic care, for mattress size: 700–1,000 x 2,000 mm
- > Version: With electrically adjustable head and foot sections
- > Material: Metal
- > Colour: Anthracite grey, RAL 7016
- > Load bearing capacity: 160 kg
- > Dim. (W x L): 900 x 2,000 mm
- > For mattress size (W x L): 700–1,000 x 2,000 mm


Functionality



Lying position



Adjustment of head and foot section



Height adjustment

Model Basic

Version	Colour	Cat. No.
With slatted frame		
With adjustable feet	Slatted frame: Unfinished	271.91.713
	Slatted frame: Silver foil-covered	271.91.714
For suspending	Slatted frame: Unfinished	271.91.710
	Slatted frame: Silver foil-covered	271.91.711
With castors	Slatted frame: Unfinished	271.91.716
	Slatted frame: Silver foil-covered	271.91.717
Without slatted frame		
With adjustable feet	–	271.91.801

Packing: 1 piece

Customised Topco services

Other sizes and versions available as Topco service.

Model Basic – Topco

Version	Cat. No.
Customised	271.91.807

Packing: 1 piece

topCo CUSTOMISED
ORDER QUANTITY FROM 1 PIECE

The following features can be selected:

- > Version. With adjustable feet, with castors, for suspending
- > With or without slatted frame
- > Slatted frame version: Fixed, manually adjustable, electrically adjustable
- > Required slatted frame dim.: Length/width (in cm)
- > Internal bed dim.: Length/width (in cm)

Slatted frames	► TCH-FF ► section 8
Mattress bracket for slatted frame	► TCH-FF ► section 8
Mattresses	► FF 7.89

Slatted frames	► TCH-FF ► section 8
Mattress bracket for slatted frame	► TCH-FF ► section 8
Mattresses	► FF 7.89